


FIBRE CEMENT: SEALANTS

SINGLE SEALANT 150mm LAP Sheltered to moderate sites

Less than 56.5lm/m² of wind-driven rain per spell

Minimum roof pitch	Minimum end lap	End laps treatment	Side laps treatment
≥22.5°	150mm	Unsealed	Unsealed
≥15°	300mm	Unsealed	Unsealed
≥15°	150mm	Sealed	Sealed
≥10°	300mm	Sealed	Sealed
≥5°*	300mm	Double Sealed	Sealed

* The minimum pitch for Cemsix corrugated sheets is 5°. On roof pitches between 5° and 10° the maximum slope length is 15 m.

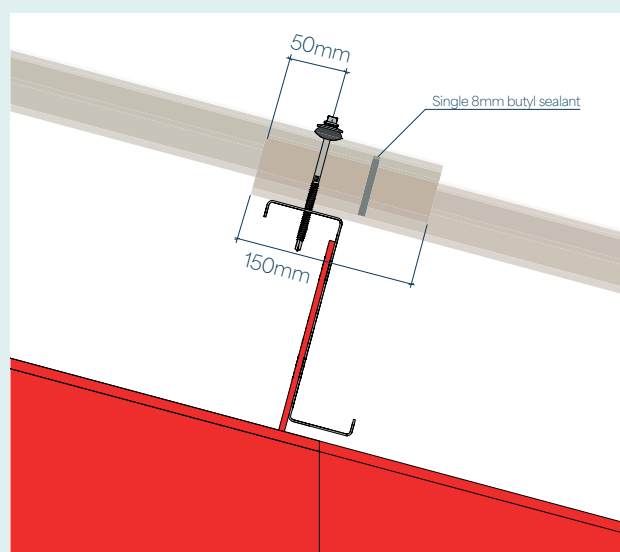

DOUBLE SEALANT 300mm LAP Moderate to severe sites

More than 56.5lm/m² of wind-driven rain per spell

Minimum roof pitch	Minimum end lap	End laps treatment	Side laps treatment
≥25°	150mm	Unsealed	Unsealed
≥17.5°	150mm	Sealed	Unsealed
≥15°	150mm	Sealed	Sealed
≥10°	300mm	Sealed	Sealed
≥5°*	300mm	Double Sealed	Sealed

* The minimum pitch for Cemsix corrugated sheets is 5°. On roof pitches between 5° and 10° the maximum slope length is 15 m.

